

Compression Mounts


VM - VMT series

VM/VMT

These mounts are ideal for a wide range of installations where simple and precise leveling is required. Diamond cell neoprene pads provide a firm grip to the floor. VM mount is self-aligning without sacrifice to stability and compensates for slightly uneven floor. A neoprene pad fits tight in cast iron cover cavity preventing separation of pad and cover which eliminates reliance on adhesives. Load range of up to 12,000 lbs. with leveling feature make this mount very popular for numerous industrial applications.

SPECIAL FEATURES:

- Controls vibration and noise
- Resistant to oil and cleaning compounds
- Save on installation costs, no cementing required
- Meets OSHA requirements for anchoring machinery
- Ideal for placement under equipment with a vertical load only.

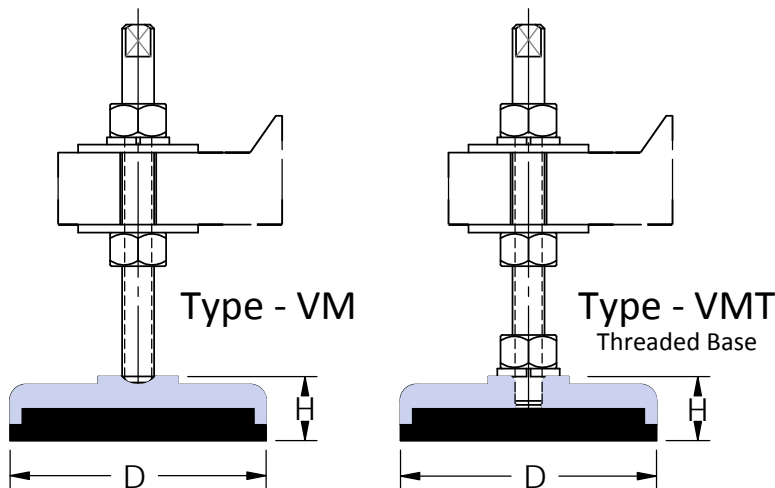

TYPE	TYPE	Maximum Load Lbs.		Level Adjustment	Leveling bolt size	Mount Dimensions	
		Non-impact Machinery	Impact Machinery			D	H
VM-500	VMT-500	500	350	1.0"	1/2-13 x 6"	Ø 4.0"	1"
VM-1000	VMT-1000	1000	700	1.0"	1/2-13 x 6"	Ø 4.0"	1"
VM-2004	VMT-2004	2000	1400	1.0"	5/8-11 x 8"	Ø 4.0"	1"
VM-2007	VMT-2007	2000	1400	1.0"	3/4-16 x 6"	Ø 7.0"	1-1/4"
VM-4000	VMT-4000	4000	2800	1.0"	3/4-16 x 6"	Ø 7.0"	1-1/4"
VM-8000	VMT-8000	8000	5600	1.0"	3/4-16 x 6"	Ø 7.0"	1-1/4"
VM-12075	VMT-12075	12000	8500	1.0"	3/4-16 x 6"	Ø 7.0"	1-1/4"
VM-12100	VMT-12100	12000	8500	1.0"	1-14 x 8"	Ø 7.0"	1-1/4"

NOTE: Maximum Deflection of all VM mounts will not exceed 0.060" at maximum (static) load