


SPRING MOUNTS


1" Deflection Model A-2-100 — 2" Deflection Model A-2-140 Series

A2 series mounts provide excellent isolation from critical vibrations, and efficiently prevent structures from transferring vibrations.

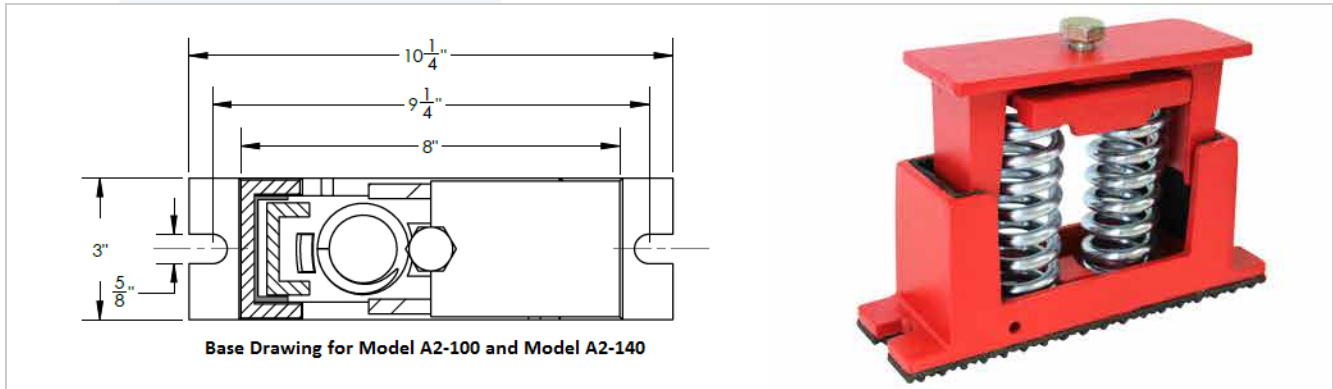

Features:


- ✓ Side rubber pads to prevent metal to metal contact.
- ✓ Leveling plate fits inside cast iron housing to provide extra stability in all directions.
- ✓ Spring elements are color coded.
- ✓ These mounts are available in two assemblies: hexagon head screw top and flat rubber top.
- ✓ Maximum leveling adjustment 1/2".

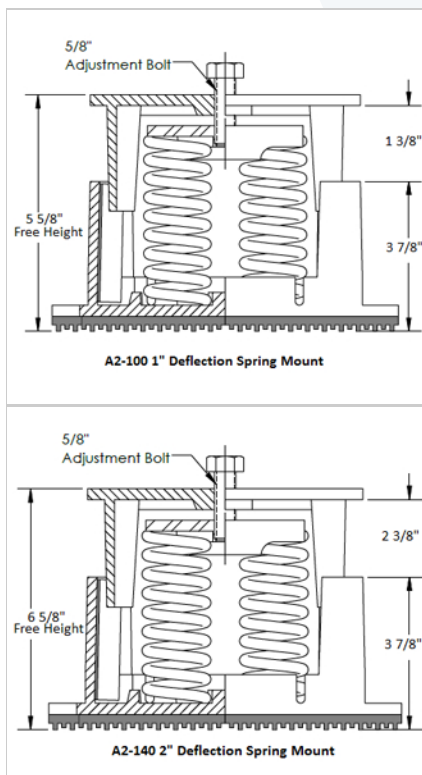

Recommended for:

Air conditioning equipment, compressors, air handling units, centrifugal fans, pumps, chillers and applications where low-frequency isolation is required.

SPRING MOUNTS

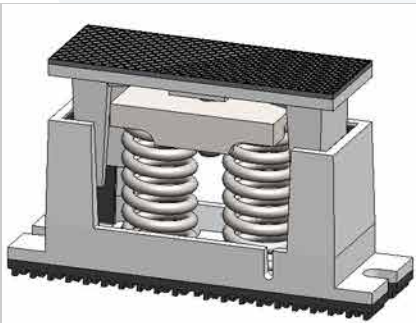

Flat Surface Top Assembly with Rubber





Model	Max load (lbs)	Deflection at Max Load (in)	Solid Load (lbs)	Deflection at Solid Load (in)	Colour
-------	----------------	-----------------------------	------------------	-------------------------------	--------

1" Deflection



Ax-2-101	110	1.15	220	2.25	Black
Ax-2-103	260	1.08	520	2.13	Blue
Ax-2-105	475	0.83	950	1.75	Brown
Ax-2-107	1100	0.93	2.200	1.70	Yellow
Ax-2-109	1500	0.63	3.000	1.25	Green

2" Deflection

Ax-2-140	130	1.75	260	3.00	Black
Ax-2-142	280	1.25	560	2.7	Blue
Ax-2-144	600	1.25	1200	2.4	Brown
Ax-2-146	1200	1.10	2400	2.2	Yellow
Ax-2-148	1800	1.00	3600	2.00	Green

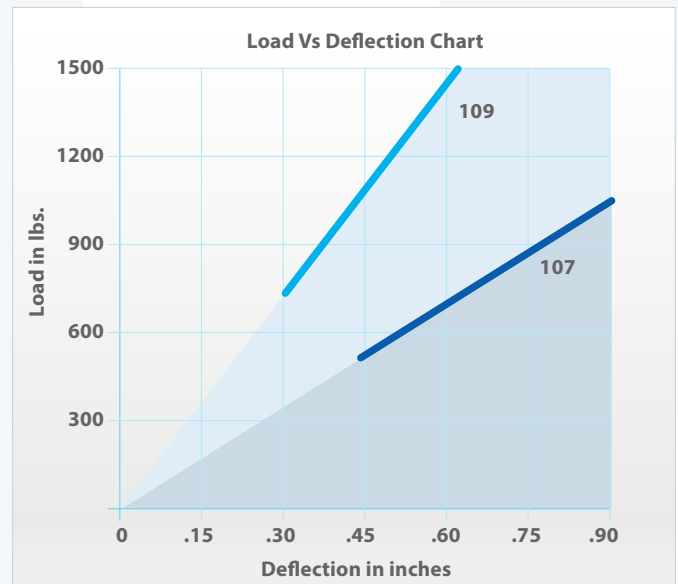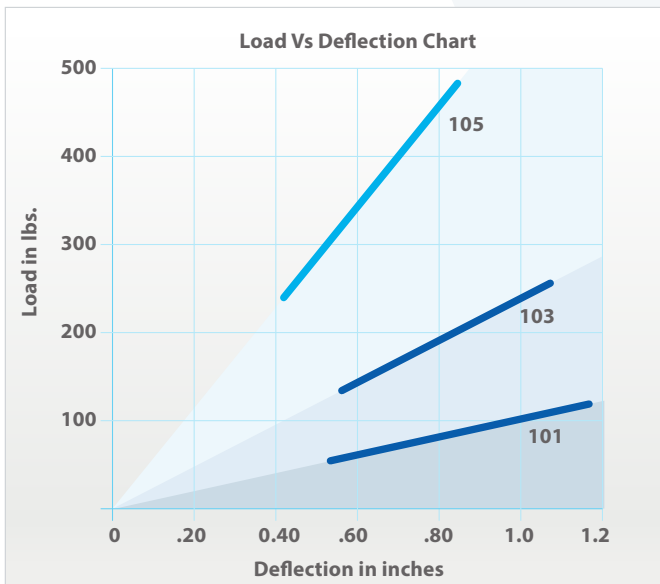

SPRING MOUNTS

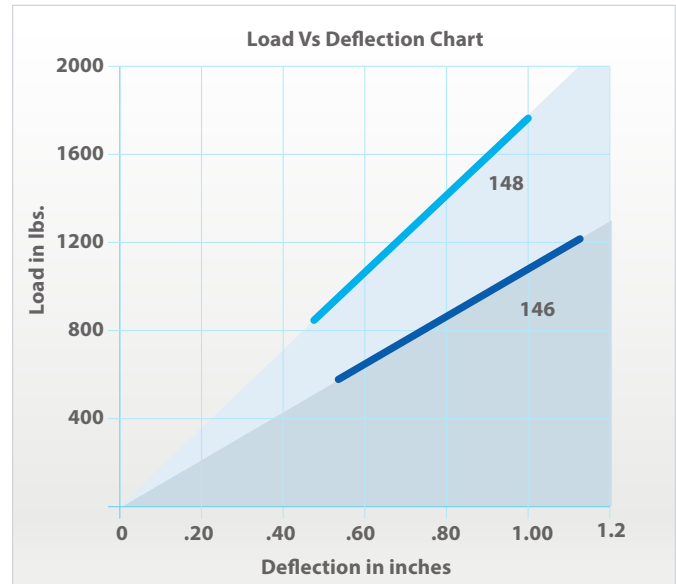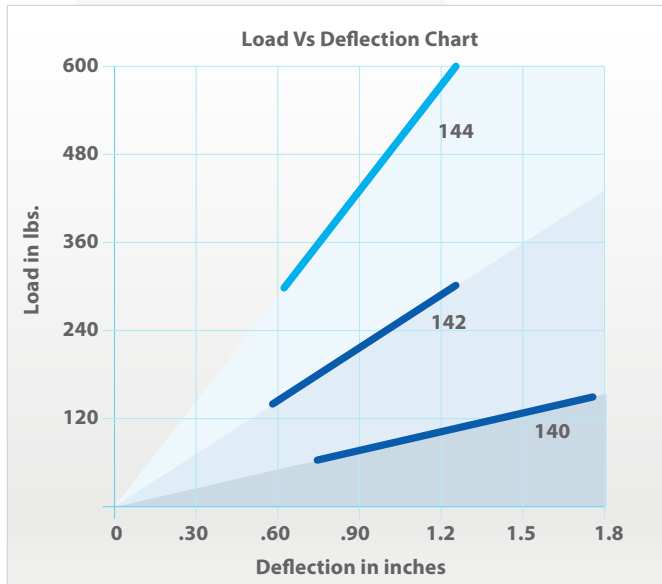

- Springs have additional travel to solid beyond rated load.