


## EFFECTIVE LOAD SECUREMENT FOR A WIDE RANGE OF PRODUCTS




- ✓ For any industry
- ✓ Reduces loading-unloading times
- ✓ Takes fewer people to load the truck

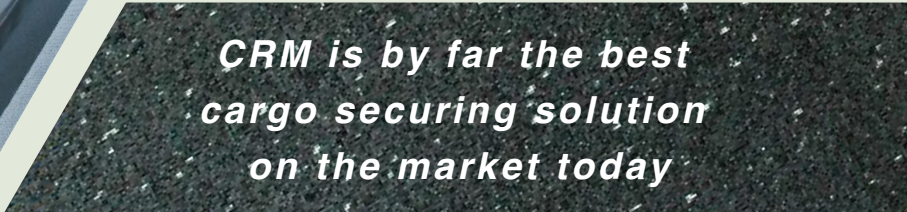

**CRM is by far the best cargo securing solution on the market today**

- fragile goods
- flooring
- glass
- building materials
- food and beverage
- paper rolls
- metal coils
- steel drums
- metal casing



**Sudden impact at speed as low as 3.0 mph can cause load movement.**

**CRM Cargo restraint mats** prevent products from shifting and rotation from impact and vibration and is a good economic alternative to costly wood blocking and bracing methods.

**CRM** is manufactured to **COF** value greater than 0.8 to protect your cargo even at low speed.

The yellow marking and rating on **CRM** is your assurance that our **Cargo Restraint Mats** are made as per **North American Cargo Securement Standard** performing criteria.

### 3 TYPES OF CRM

#### CRM-5 ultimate

The best load securement product on the market made with solid, fiber-reinforced masticated rubber for great tear and stretch resistance. It will not tear-crumble or roll up over fork truck wheels.

#### CRM-6E extreme

Has physical properties approaching CRM-5 ultimate offering super density and tensile strength at more economical price.

#### CRM-6 premium

A performance based choice for most cargo restraint application. Engineered from recycled tires into durable rebonded crumb mats. Perfect for all types of transportation modes.

| TYPE           | SIZE                       | TENSILE TEST                        | ELONGATION                  | TEAR                              | HARDNESS | COF |
|----------------|----------------------------|-------------------------------------|-----------------------------|-----------------------------------|----------|-----|
| CRM-5 ultimate | 2 mm x 24" 1,300 feet/roll | 768 psi - grain<br>478 psi - across | 18% - grain<br>74% - across | 199 pi - grain<br>302 pi - across | 79       | 1   |
| CRM-6E extreme | 2 mm x 24" 1,800 feet/roll | 390 psi grain                       | 70% - grain                 | 142 pi - grain                    | 65-75    | 1   |
| CRM-6 premium  | 2 mm x 24" 1,800 feet/roll | 210 psi - grain                     | 90% - grain                 | 70 pi - grain                     | 45-65    | 1   |

Vibrasystems Inc makes no representations or warranties with respect to the suitability of materials for a particular purpose. Buyers and users must determine the safety and suitability of Vibrasystems Inc products for their own purposes and assume all risk, responsibility, and liability for all injuries, losses, or damages arising from the application of the information or use of Vibrasystems Inc products, whether or not occasioned by Vibrasystems Inc negligence or based on strict product liability.

**Please contact us: (see contact information below)**