

FREESTANDING MOUNTS

CRS/CSS freestanding mounts are designed to isolate the transfer of vibrations from the machines to the base/floor and reduce noise. **CRS** has a metal cap, which can be made of mild steel or stainless steel, and an elastomer rubber element. The metal cap protects the rubber element from contact with grease, industrial oil, etc. Several models are available:



CRS


- CRS:** plated steel cap and rubber element.
- CRSL:** CRS with leveling hardware.

Recommended for:

Transformers, compressors, general machine shop equipment, presses, conveyors, platforms, and other industrial applications where lateral forces are up to 15% of vertical maximum load.

Features:

- ✓ Circular elastomer element with a grooved base provides excellent grip on the floor.
- ✓ Rubber element available in Neoprene and EPDM.
- ✓ User friendly, easy to install.
- ✓ Metal cap is available in plated steel.
- ✓ Good oil and grease resistance.

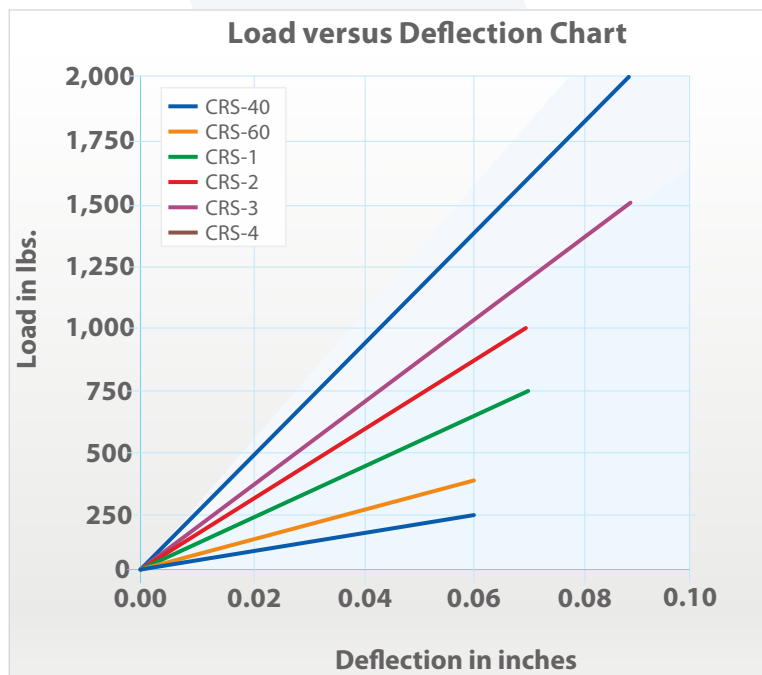

FREESTANDING MOUNTS

Model	Compression load (lbs)	C	Overall dimensions in inches (in)			
			Outside Diameter (D)	Height (H)	Thread (T)	Stud L
CRS-40	250	1-1/2	2-5/16	3/4	3/8-16	-
CRS-60	400	1-2/2	2-5/16	3/4	3/8-16	-
CRS-1	750	2-1/2	3-1/2	1-1/8	1/2-13	-
CRS-2	1,000	2-1/2	3-1/2	1-1/8	1/2-13	-
CRS-3	1,500	3-1/2	4-15/16	1-3/8	5/8-11	-
CRS-4	2,000	3-1/2	4-15/16	1-3/8	5/8-11	-
CRSL-40	250	1-1/2	2-5/16	3/4	3/8-16	5
CRSL-60	400	1-2/2	2-5/16	3/4	3/8-16	5
CRSL-1	750	2-1/2	3-1/2	1-1/8	1/2-13	5
CRSL-2	1,000	2-1/2	3-1/2	1-1/8	1/2-13	5
CRSL-3	1,500	3-1/2	4-15/16	1-3/8	5/8-11	7
CRSL-4	2,000	3-1/2	4-15/16	1-3/8	5/8-11	7

