

STAINLESS STEEL FREESTANDING MOUNTS

CSS freestanding mounts are designed to isolate the transfer of vibrations from the machines to the base/floor and reduce noise. **CSS** has a stainless steel metal cap and an EPDM rubber element. The metal cap protects the rubber element from contact with grease, industrial oil, etc. Three configurations are available:

- CSS:** stainless steel cap and rubber element.
- CSSL:** CSS with leveling hardware.
- CSSLB:** CSS with leveling hardware and a metal base.




CSS

Recommended for:

Transformers, compressors, general machine shop equipment, presses, conveyors, platforms, and other industrial applications where lateral forces are up to 15% of the vertical maximum load.

Features:

- ✓ Circular elastomer element with a grooved base provides excellent grip on the floor.
- ✓ 316L stainless steel metal cap and leveling hardware.
- ✓ User friendly, easy to install.
- ✓ Good oil and grease resistance.

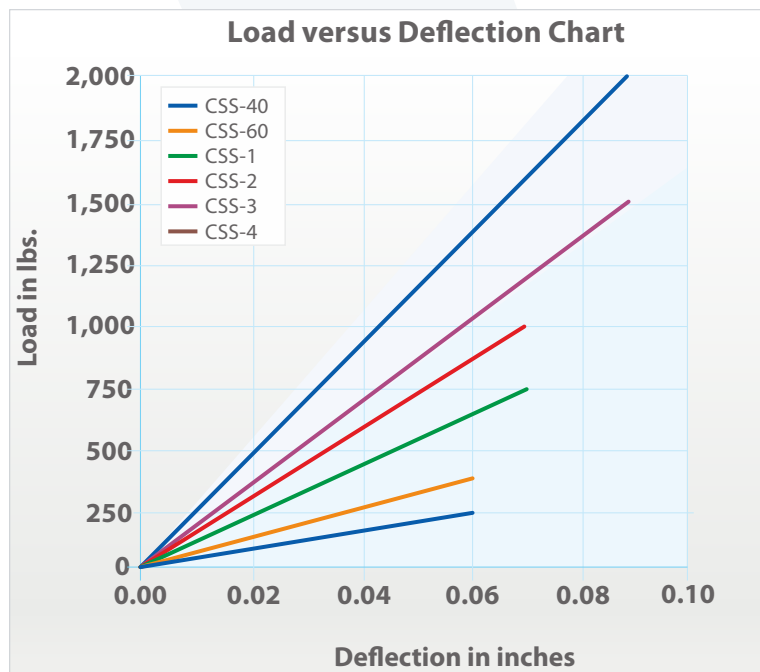

STAINLESS STEEL FREESTANDING MOUNTS

Model	Compression load (lbs)	Overall dimensions in inches (in)							
		C	Outside Diameter D	Height H	Thread T	Stud L	F	Hole Spacing E	Hole Ø G
CSS-40	250	1-1/2	2-5/16	3/4	3/8-16	-	-	-	-
CSS-60	400	1-2/2	2-5/16	3/4	3/8-16	-	-	-	-
CSS-1	750	2-1/2	3-1/2	1-1/8	1/2-13	-	-	-	-
CSS-2	1,000	2-1/2	3-1/2	1-1/8	1/2-13	-	-	-	-
CSS-3	1,500	3-1/2	4-15/16	1-3/8	5/8-11	-	-	-	-
CSS-4	2,000	3-1/2	4-15/16	1-3/8	5/8-11	-	-	-	-
CSSL-40	250	1-1/2	2-5/16	3/4	3/8-16	5	-	-	-
CSSL-60	400	1-2/2	2-5/16	3/4	3/8-16	5	-	-	-
CSSL-1	750	2-1/2	3-1/2	1-1/8	1/2-13	5	-	-	-
CSSL-2	1,000	2-1/2	3-1/2	1-1/8	1/2-13	5	-	-	-
CSSL-3	1,500	3-1/2	4-15/16	1-3/8	5/8-11	7	-	-	-
CSSL-4	2,000	3-1/2	4-15/16	1-3/8	5/8-11	7	-	-	-
CSSLB-3	1,800	3-3/4	5-3/16	1-3/4	5/8-11	6-3/4	5-1/2	4-11/16	7/16
CSSLB-4	2,800	3-3/4	5-3/16	1-3/4	5/8-11	6-3/4	5-1/2	4-11/16	7/16

