
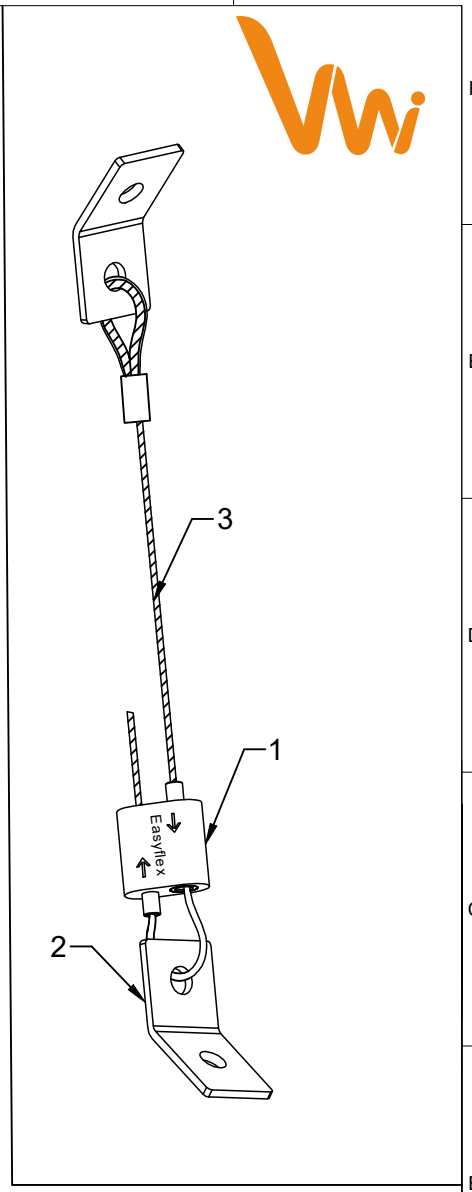
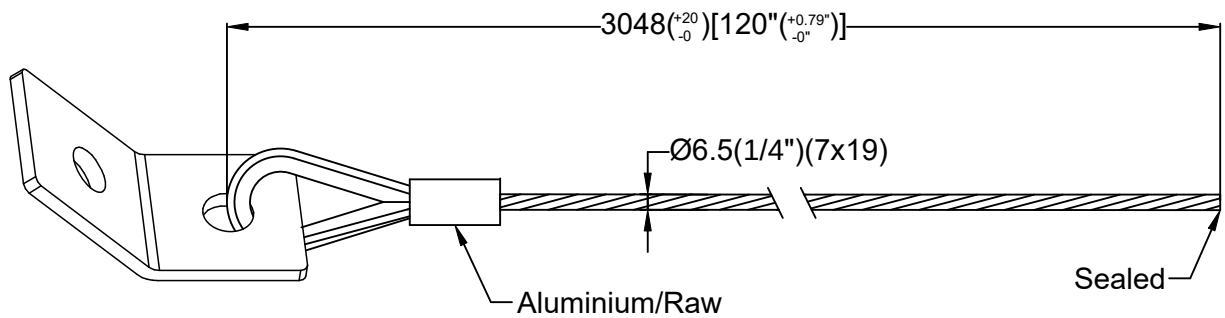
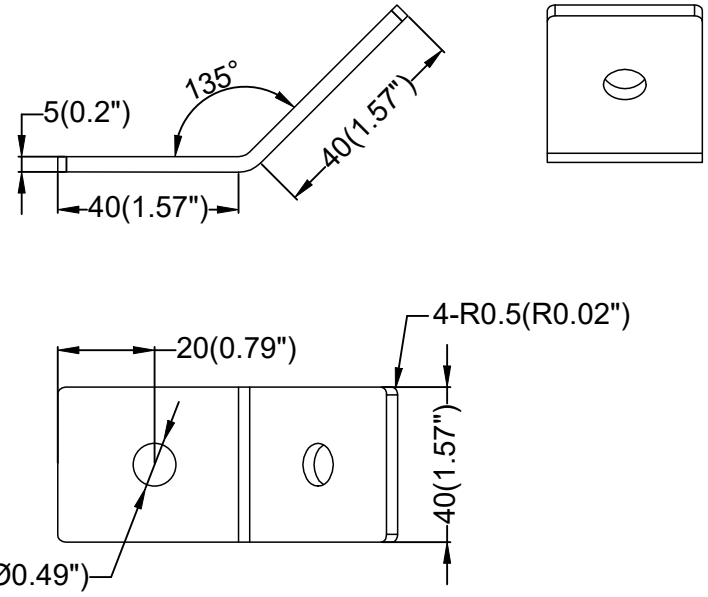


Confidential : All rights reserved ISO 16016. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without prior permission. All rights reserved in the event of the granting of a patent or the registration of a utility model or design. Offenders will be held liable for the payment of damages.

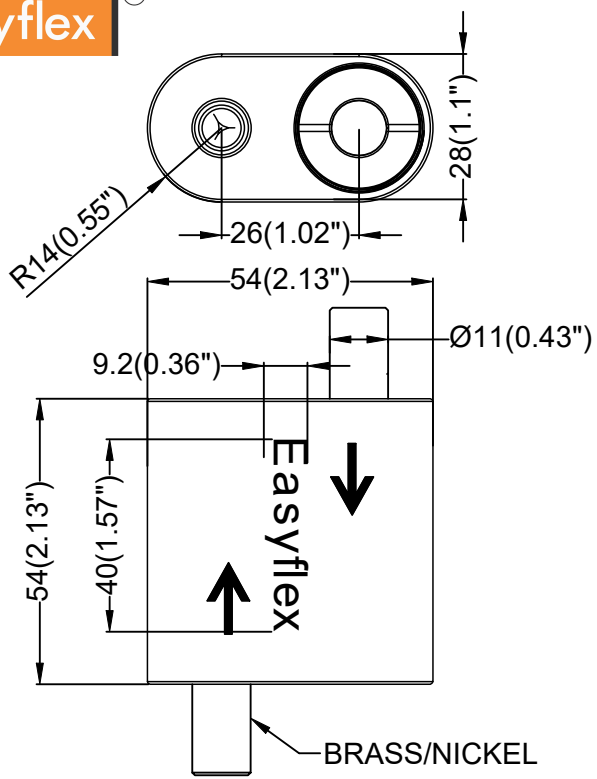

- Notes:-
- 1.Remove all burrs and break all sharp edges.
 - 2.Meet the RoHS requirements;
 - 3.The steel wire rope has no loose stock, yellow, black and other undesirable phenomena.
 - 4.Minimum pull-off force:2100lbs(952.5Kg) , safe loading : 420lbs(190.5Kg)

03	Wire	MS	Galvanised	01
02	Cleat	MS	Blue Zinc	02
01	Easy lock	Aluminum + Brass	Matt Natural Anodized+Nickel	01
Sl. No.	Components	Material	Finish	Qty
Bill Of Material				
Client Name:-		OWNER : Easyflex / VibraSystems		
DRAWN BY				
CHECKED BY				
APPROVED BY				
SCALE: NTS				
DRAWING No.				
DATE				