

## SANDWICH MOUNTS

**SM mount** allows the top and bottom plates to be drilled anywhere along their length. The plated steel plates are bonded together with oil-resistant elastomer.

### Recommended for:

Wall and ceiling installations where a channel can be used as a mounting rail. Small-cut blocks can be used as individual isolators.





### Features:

- ✓ Effectively isolates against horizontal, vertical, and shock forces.
- ✓ Superior ability to withstand shear load with low horizontal deflection.
- ✓ Low installation height.

Model	Linear Vertical Load (lbs/in)	Dimensions in inches				Linear Spring Rate (lbs/in)	Shipping Weight (lbs)
		L	W	H	T		
SM-1-12	300	12	2	1-3/4	.312	2,400	6
SM-1-24	300	24	2	1-3/4	.312	2,400	12
SM-1-48	300	48	2	1-3/4	.312	2,400	24
SM-2-12	450	12	3	2	.375	3,000	9.2
SM-2-24	450	24	3	2	.375	3,000	18.5
SM-2-48	450	48	3	2	.375	3,000	37
SM-3-12	600	12	4	2-5/16	.500	4,800	19
SM-3-24	600	24	4	2-5/16	.500	4,800	38
SM-3-48	600	48	4	2-5/16	.500	4,800	76

Load Vs Deflection Chart

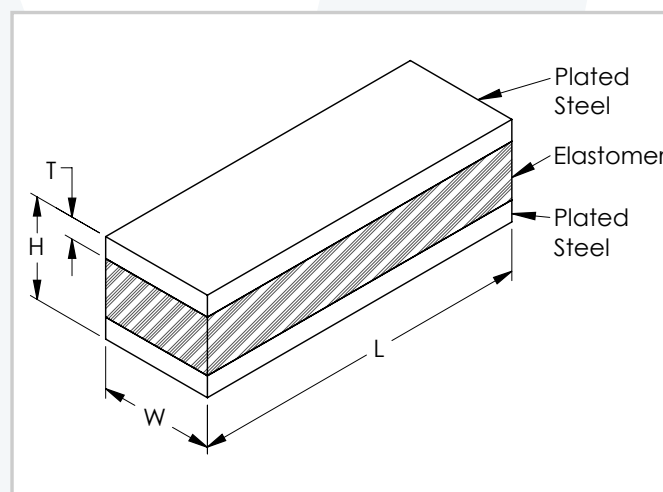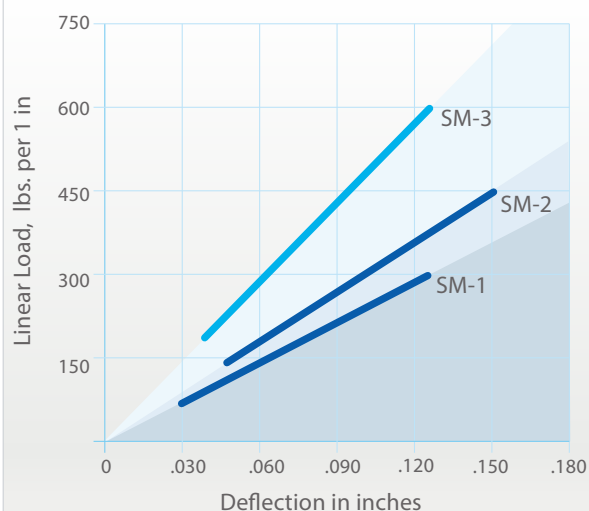

### Custom Options:

- \* Material: Plates can be made of Aluminum, or stainless steel. Other elastomer materials/compounds available on request.
- \* Available in any length in 2" increments and in custom width and height with pre drilled and tapped hole.
- \* Bars can be welded to steel bases of any design upon request.