


SANDWICH MOUNTS


SM mount allows the top and bottom plates to be drilled anywhere along their length. The plated plates are bonded together with oil-resistant elastomer.

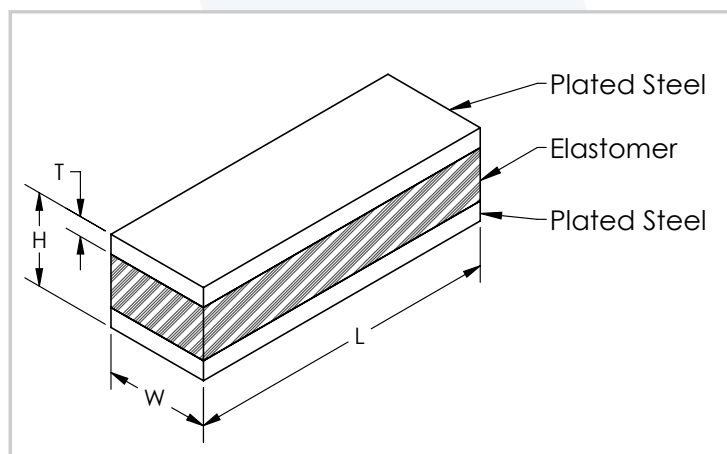

Features:

- ✓ Effectively isolates against horizontal, vertical, and shock forces.
- ✓ Superior ability to withstand shear load with low horizontal deflection.
- ✓ Low installation height.

MODEL	Max. Vertical Load (lbs)	Mount Dimensions (in)				Spring Rate (lbs / in)
		L	W	H	T	
SM-1-12	3,600	12	2	1-3/4	5/16	28,800
SM-1-24	7,200	24	2	1-3/4	5/16	57,600
SM-1-48	14,400	48	2	1-3/4	5/16	115,200
SM-2-12	5,400	12	3	2	3/8	36,000
SM-2-24	10,800	24	3	2	3/8	72,000
SM-2-48	21,600	48	3	2	3/8	144,000
SM-3-12	7,200	12	4	2-5/16	1/2	57,600
SM-3-24	14,400	24	4	2-5/16	1/2	115,200
SM-3-48	28,800	48	4	2-5/16	1/2	230,400

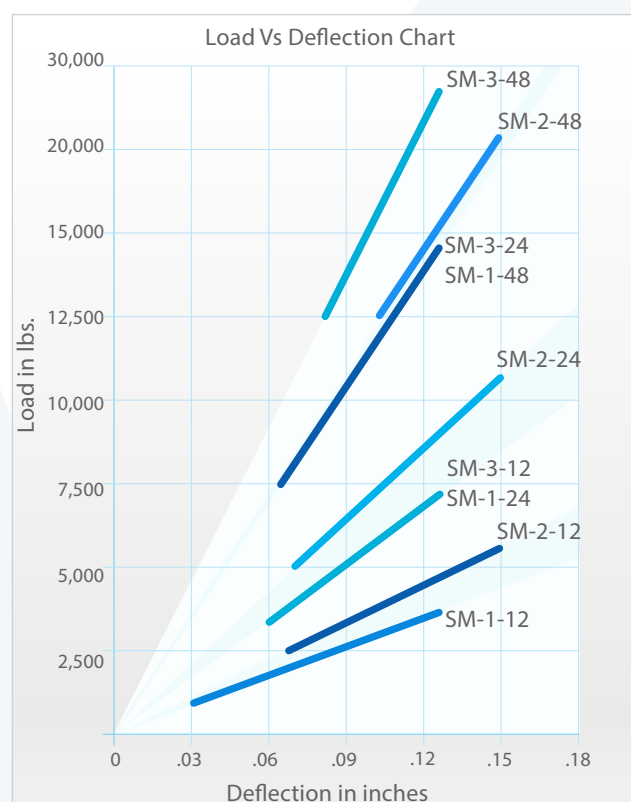

Custom Options:

Material: Aluminum, or stainless steel.

Other elastomer materials/compounds available on request.

Available in any length in 2" increments and in custom width and height with pre drilled and taped hole.

Bars can be welded to steel bases of any design upon request.